



DP16 with local control – BiPolar Control

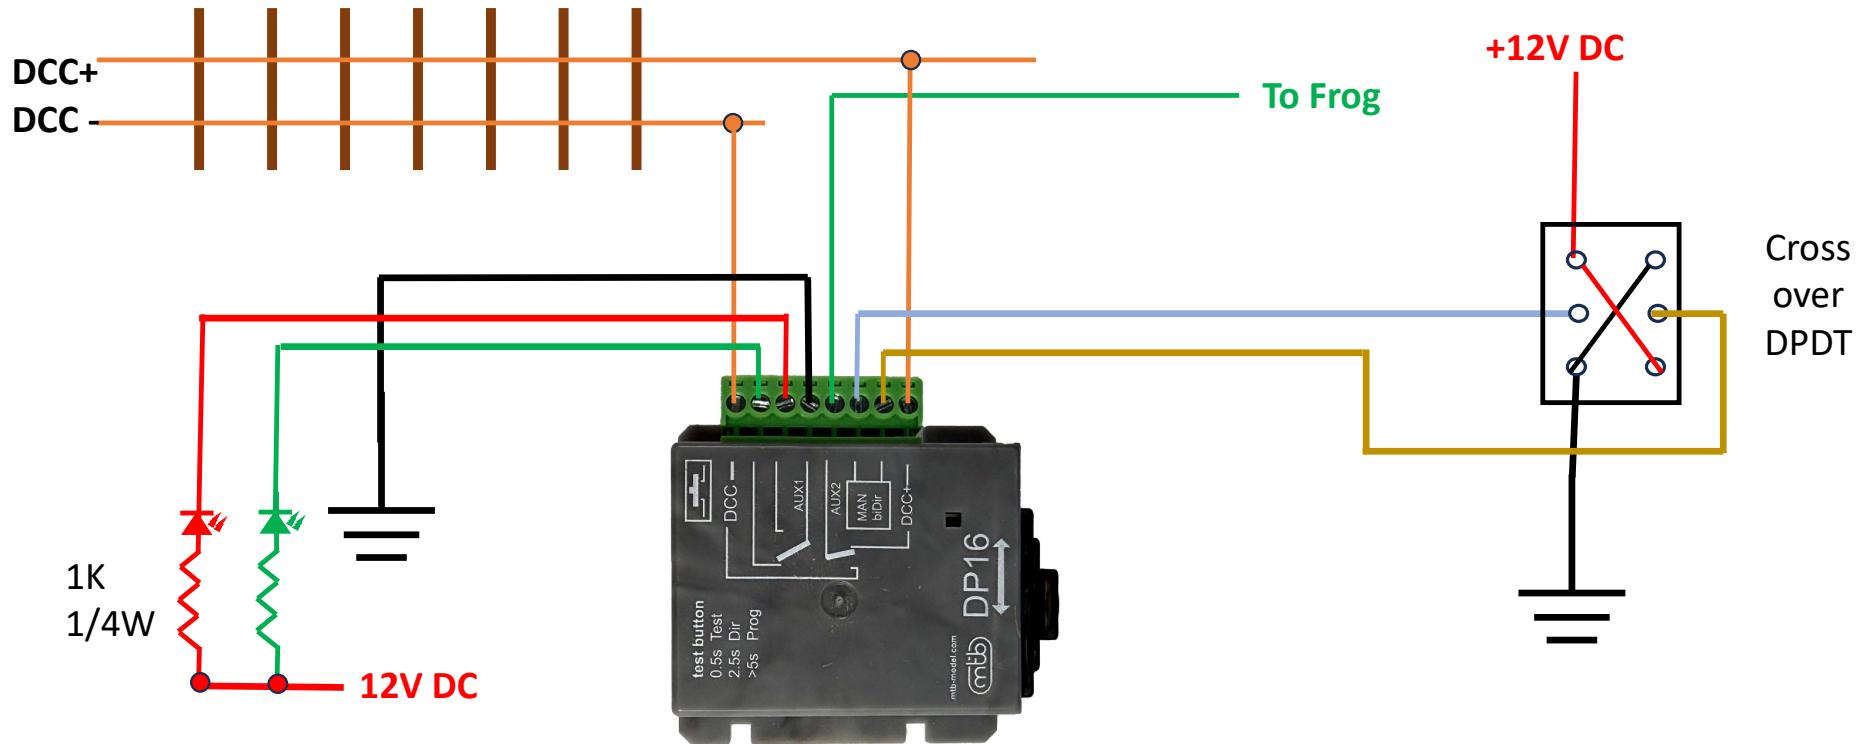

DP16 with local control – 3 Wire using included 2.2K pull up resistors

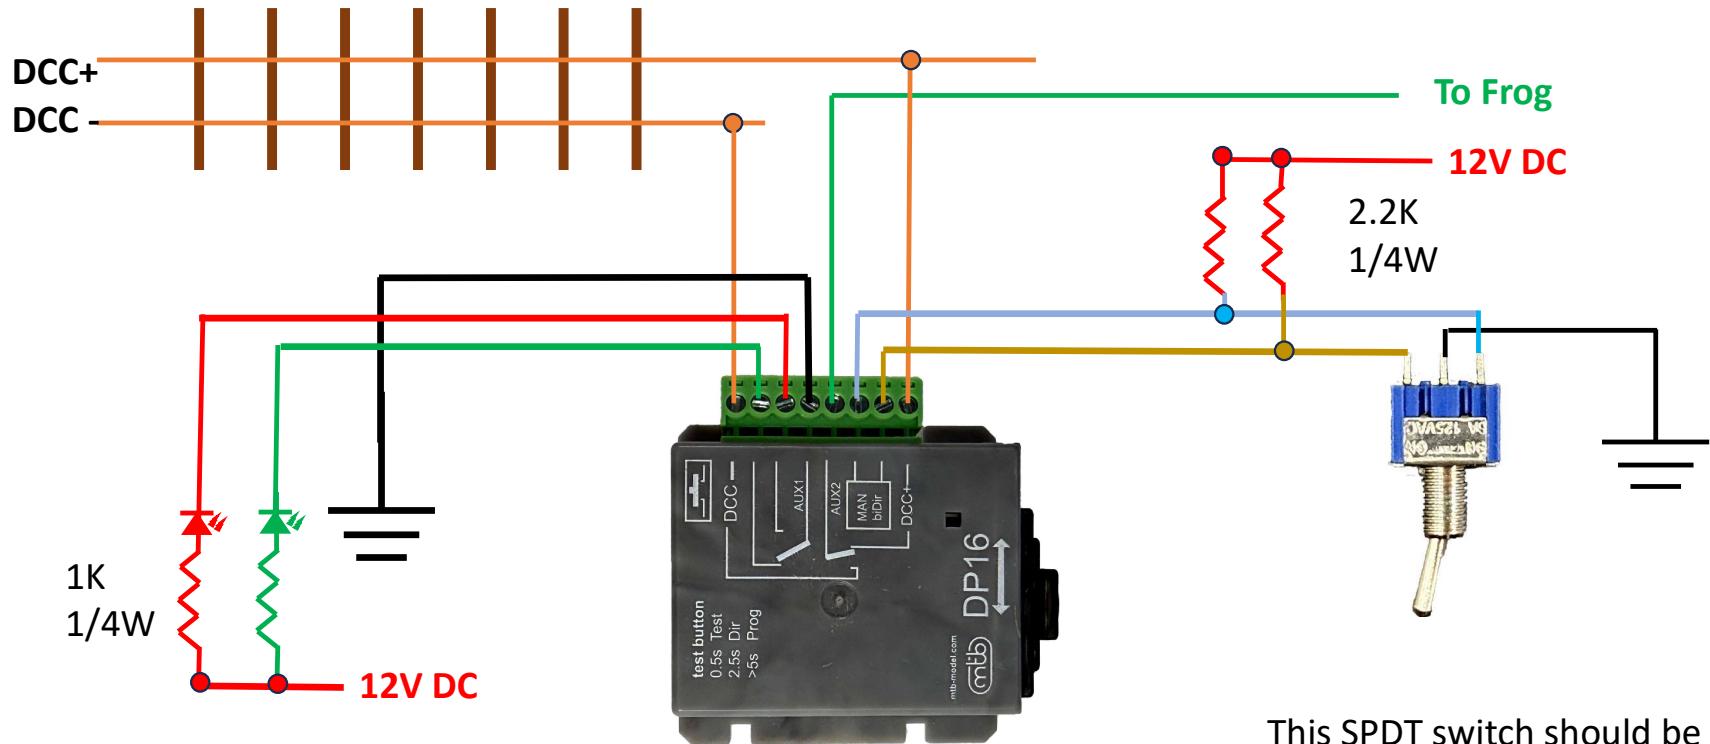

This SPDT switch should be Continuous unless being driven by a diode matrix

DP16 “Man BiDir” Connections

2 wire mode




Normal polarity,
Switch moves to
Position 1

5-15VDC
Ground

MAN BiDir

Ground
5-15VDC

Reverse polarity,
Switch moves to
Position 2

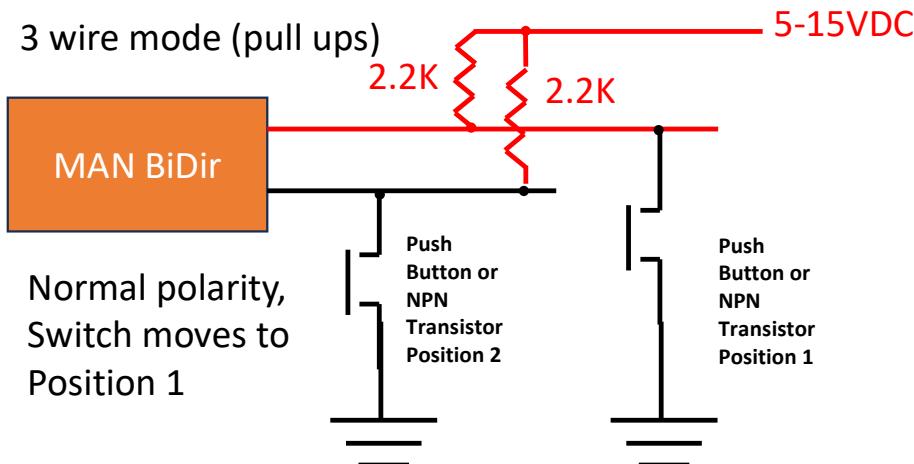

Normal polarity,
Switch moves to
Position 1

Ground referenced
To 5-15 V supply

